



SNAPSHOT MOSAIC SWIR RANGE HYPERSPECTRAL IMAGING CAMERA

Imec snapshot SWIR range hyperspectral imaging camera offers a simple, fast and easy application set-up for your hyperspectral acquisition and analysis of sample materials. Our solution is flexible and designed to enable application development using hyperspectral imaging technology, delivering relevant test data within a few minutes after initial installation. It includes all required components, from imager to camera, lens, interface cables and software and can be easily rebuilt into different configurations.

FOR REAL-TIME, VIDEO-RATE COMMERCIAL APPLICATIONS

Snapshot mosaic filter based hyperspectral cameras enable real-time, video-rate processing of spectral imaging data. This is key for applications where objects are moving (e.g. sorting some food on a conveyor belt), or where the camera is moving (e.g. when carried on a drone UAV) or simply in static mode to prevent any motion artifacts during long time acquisitions (e.g. respiration movements of tissues in medical imaging, or moving target in security & surveillance applications)


KEY BENEFITS

- **Video-rate** acquisition of hyperspectral imaging data cubes with no motion artifacts, perfectly suited for acquisition of moving objects or scenes
- **Easy set-up** of the complete system
- **Flexible configuration:** quickly modify the set-up once you get more acquainted with the hyperspectral imaging snapshot technology hardware and software



Hyperspectral imaging acquisition software of imec: several objects (dry and wetted cake, plastic PET and PVC, nuts and their shell) are shown in the SNm3x3 = 9 spectral colors tiled view. The HSI data-cube can be classified in real-time at 200+ FPS (see next page)

IMEC HYPERSPECTRAL IMAGER & CAMERA HARDWARE SPECIFICATIONS

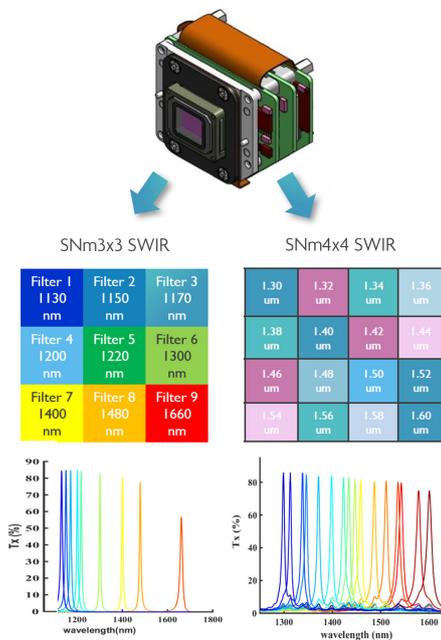


Snapshot mosaic hyperspectral image sensors with $3 \times 3 = 9$ colors and $4 \times 4 = 16$ spectral bands. Each filter is patterned at pixel level and integrated into the Cardinal 640 InGaAs image sensor from SCD

Spatial resolution	VGA (640 x 480) total resolution
Spectral resolution	9 bands in 1.1 - 1.7 μm range (SNm3x3 SWIR version) 16 bands in 1.1 - 1.7 μm range (SNm4x4 SWIR version)
Bandwidth per band (FWHM)	-10 - 15 nm
Base imager type	InGaAs based, Cardinal 640 sensor with TEC cooler electronic
Acquisition speed	up to 120 hyperspectral imaging data-cubes per second (USB3.0 interface limited)
Pixel pitch	15 μm pixels
Bit depth	13 bits
Optics	16 / 25 / 35 / 50 mm lenses, F2.8, C-mount
Interface	USB3.0 + GPIO + I/O for triggering
SW acquisition modes	HDR modes (dual or multi-exposures for best SNR per band channel)
Power Consumption	2 Watts at 60 FPS
Dimensions (W x H x D)	65 x 65 x 130 cm
Weight	260 g (without lens)

APPLICATIONS

- Optical sorting in machine vision
- Chemical analysis of material composition
- Food safety and inspection
- Medical & healthcare
- Pharmaceutical manufacturing
- Semiconductor & photovoltaic
- Waste recycling
- Human machine interface
- Minerology & mining
- Precision agriculture
- Security & surveillance

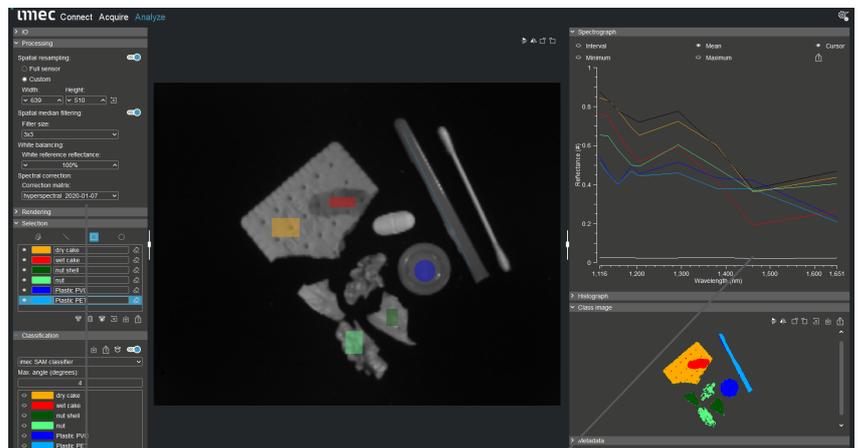

Main control panel

- Camera exposure time, framerate
- Hardware triggering
- Cube / frame export
- Light calibration
- Reflectance calculation
- Superresolution

Visualization panel

- Spectral plot
- Color reconstruction
- False color image
- NDVI
- Live view
- Classification

User interface of imec in house acquisition software, designed for user-friendly hyperspectral imaging operations.

CONTACT US

hsi.sales@imec.be

DISCLAIMER - This information is provided 'AS IS', without any representation or warranty. Imec is a registered trademark for the activities of IMEC International (a legal entity set up under Belgian law as a "stichting van openbaar nut"), imec Belgium (IMEC vzw supported by the Flemish Government), imec the Netherlands (Stichting IMEC Nederland, part of Holst Centre which is supported by the Dutch Government), imec Taiwan (IMEC Taiwan Co.) and imec China (IMEC Microelectronics (Shanghai) Co. Ltd.) and imec India (Imec India Private Limited), imec Florida (IMEC USA nanoelectronics design center).